


## List of Used Materials

# PAK

Pouf System

## DESIGN

T Design Studio

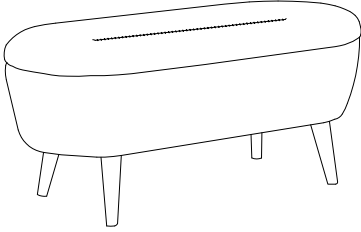

## MATERIAL

Skeleton structure consists of 18 mm MDF.

3 mm MDF is used in for the around of the back body.

Foams:

\*50 mm 35 DNS (B1 quality) foam is used for the seat.

\*10 mm 28 DNS (B1 quality) foam is used for the side of the front surface.

\*20 mm 28 DNS (B1 quality) foams are used for the inside of the back and arm surface.

Foams are gummed to the sofa with special glue. 100 gr of fiber is gummed on the foams.

Foams are fire retardant.

According to fabric form cutting and sewing process continues.

The fabric is fixed to the product with special fabric staples.

Fabrics are fire retardant.

Under the couch, the wire (90 gr) is punched with staples.

The legs are wooden and there are different lacquer colors for the legs. Legs are assembled by bolts with sofa body.